



4MP 30x IR Network PTZ Camera

ZN8-P4X30DL-H



Key Features

- 1/2.8" progressive scan CMOS
- 30x optical zoom and 16x digital zoom
- Supports face, human and vehicle detection and capture
- Supports smoke and fire detection as well as smart motion detection
- Auto tracking and perimeter protection based on deep learning
- Intelligent analysis: intrusion, single line crossing, double line crossing, loitering, wrong-way, illegal parking and people counting
- True WDR, 3D DNR, ICR, Optical Defog and Anti-shake
- Smart IR distance up to 200m
- IP66
- NDAA compliant



Specification


Camera				
Image Sensor	1/2.8" Progressive Scan CMOS			
Max. Resolution	2592(H) × 1520(V)			
Electronic Shutter	Auto/Manual, 1/5 to 1/20,000s			
Min. illumination	Color: 0.07 Lux @ (F1.6, AGC ON), B/W: 0.007 Lux @ (F1.6, AGC ON), 0 Lux with IR			
Day & Night	Auto (ICR)			
Illumination Distance	IR distance up to 200m (656.2ft)			
Illuminator On/Off Control	Auto/Manual			
Lens				
Focal Length	5.3 to 159 mm			
Max. Aperture	F1.6 to F4.3			
Angle of View	H: 55.6° to 2.5°, V: 34.0° to 1.9°			
Optical Zoom	30x			
Digital Zoom	16x			
Iris Control	Auto/Manual			
Focus Control	Auto/Manual/Semi-automatic			
DORI Distance				
Lens	Detect	Observe	Recognize	Identify
Wide	104m (341.2ft)	41.6m (136.5ft)	20.8m (68.2ft)	10.4m (34.1ft)
Tele	3,120m (10,236.2ft)	1,248m (4,094.5ft)	624m (2,047.2ft)	312m (1,023.6ft)
PTZ				
Pan/Tilt Range	Pan: 0° to 360° endless, Tilt: -10° to +90°			
Pan Speed	Pan speed: 0.1° to 300°/s, preset speed: 300°/s			
Tilt Speed	Tilt speed: 0.1° to 300°/s, preset speed: 300°/s			
Presets	400			
Patrol Scan	6 Track, 12 Scan, 12 Patrol (up to 32 presets each patrol)			
Power-Off Memory	Support			
3D Positioning	Support			



PTZ Status Display	Support
Idle Motion	The time can be set (1-240 minutes), and functions such as preset positions, patrols, scans, and tracks can be run.
Video	
Streaming Capability	3 Streams
Stream/Frame Rate	Stream1: 2592×1520, 2560×1440, 2304×1296, 1920×1080, 1280×720 @25/30fps Stream2: D1, VGA, CIF @25/30fps Stream3: VGA, CIF, QVGA @25/30fps
Bit Rate Control	CBR/VBR
Bit Rate	Stream1: 200kbps to 12Mbps Stream2: 100kbps to 6Mbps Stream3: 100kbps to 3Mbps
Smart Encoder	Support
Region of Interest (ROI)	Support
Audio	
Audio Compression	G.711, RAW_PCM
Audio Bit Rate	64Kbps (G.711), 128Kbps (RAW_PCM)
Image	
Image Adjustment	Brightness, Sharpness, Contrast, Saturation
Mirror	Support
Exposure Mode	Auto/Manual
White Balance	Auto/Manual
Day/Night Setting	Auto, Day, Night, Time
Noise Reduction	2D/3D DNR
Image Enhancement	HLC, BLC, Defog, Anti-shake
Wide Dynamic Range	True WDR
S/N Ratio	50dB
Motion Detection	Support
Privacy Masking	Support 40 zones, mask color configurable
Smart Function	
Multi-Object Detection	Support face, human, vehicle detection and capture
Intelligent Analysis	Intrusion, Single line crossing, Double line crossing, Loitering, Wrong-way, Illegal parking, (support the accurate detection of vehicle and human)
Smoke and Fire Detection	Support
People Counting	Support

Smart Motion Detection	Support
Smart Tracking	Support
Network	
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, RTSP/RTP/RTCP, IGMP/Multicast, SMTP, DHCP, NTP, DNS, DDNS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, TLS
Interoperability	ONVIF, SDK, CGI
Streaming Method	Multicast
Max. User Access	10 Users
Web Viewer	<IE11, Chrome, Firefox, Microsoft Edge
Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian. Default: English
Interface	
Network Interface	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio Interface	1ch Input, 1ch Output
Alarm Interface	7ch Input, 2ch Output
RS-485	Support
CVBS Interface	Support
SD Card Slot	Built-in, up to 256GB
Electrical	
Power Supply	24VAC/36VDC/PoE++ (IEEE 802.3bt), Standard Equipped: 36VDC
Power Consumption	Less than 45 W
Operating Temperature	-40°F to 140 °F /-40°C to 60°C
Operating Humidity	Less than 90% RH
Ingress Protection	IP66, TVS4000V
Certifications	CE/FCC
Casing	Metal
Dimensions	φ 8.9×14.28 inch / φ 226×362.8mm
Net Weight	12.13lb / 5.5Kg

Dimensions (mm)

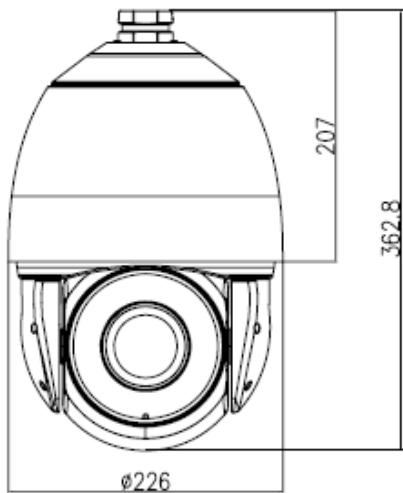

Accessories

Optional:



Wall Bracket



Ceiling Bracket



Corner Mount



Pole Mount



Junction Box



Wall Bracket



Corner Mount



Pole Mount

©2023 Design and specifications are subject to change without notice.